


产品代号 Part code	产品料号 Part NO.	线径/Wire Gauge		d	D	剥线长度 Stripping length	重量/Weight g
		mm <sup>2</sup>	AWG				
DMM-1.5	2040011015	1.5	16	1.75	3	9	2.98
DMM-2.5	2040011025	2.5	14	2.25	3.5	9	3.08
DMM-4.0	2040011040	4	12	2.85	3.9	9.6	3.1
DMM-6.0	2040011060	6	10	3.5	5	9.6	3.18

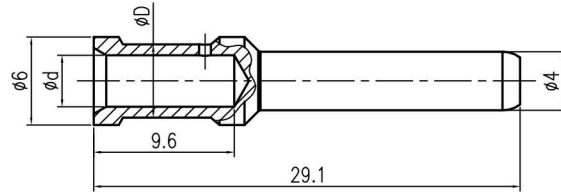


技术参数:

- 材料: 铜合金
- 表面处理: 镀金
- 额定电流: 40A
- 接触电阻:  $\leq 0.3m\Omega$
- 线径范围:  $1.5-10mm^2(16-8 AWG)$
- 可插拔次数:  $\geq 500$

Technical specification:

- Material: copper alloy
- Surface: hard-gold plated
- Rated current: 40A
- Contact resistance:  $\leq 0.3m\Omega$
- Wire gauge:  $1.5-10mm^2(16-8 AWG)$
- Mating cycles:  $\geq 500$



						表面处理 Finish	-		图号 Drawing No.	-
						材料 Material	-		产品代号 Part Code	DMM-XX
标记 Mark	处数 Number	变更描述/Description			签名 Signature	日期 Date			产品料号 Part No.	-
	姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name
绘图 Drawn		18.10.2010	标准化 Stand.	-	-	2:1	V1.0	-	-	-
审核 Checked		18.10.2010								
工艺 Process	-	-	批准 Approved		18.10.2010			All Dimensions in mm Original Size DIN A 4		浙江西霸士电气有限公司